

944

SELF-STORAGE/RESIDENTIAL

ROLL UP DOORS

PERFORMANCE • VALUE • SERVICE

Features

- | | |
|--------------------------------|-----------------------------|
| Custom Sizes | Smooth, Quiet Operation |
| Easy Installation | Strong, Durable Materials |
| No Maintenance Springs | 30/25 Yr Paint |
| Minimal Back Room Requirements | 3 Yr Material/Craftsmanship |
| Wind Rated | 10 Yr Spring Warranties |
| Rust Resistant | |



Performance Counts

When it comes to performance, Trac-Rite's model 944 delivers. With a wind rating of over 160 mph on 9' wide openings, these are seriously strong doors. The doors are packed with features for long life such as the EP3 coated spring, which resists rust and requires no lubrication. An easy to use ratcheting tension wheel at each spring makes it easy to adjust spring tension, and extra wide felt strips on the back of the door provide smooth operation for decades. For even more demanding environments, the door is available in a smooth operating windlock version (944WL).

Designed for both interior and exterior applications, Trac-Rite's model 944 is ideally suited to self-storage, yard barn and many more applications. The pre-installed Spaceguard latch accepts two padlocks and an optional cylinder lock. The doors are available in wide variety of standard colors all at one great price. Trac-Rite doors are manufactured in the United States in a modern, highly automated facility. Our advanced manufacturing techniques provide consistent quality with a high degree of efficiency.

Trac-Rite takes customer service seriously. We are 100% employee-owned. Every employee has a vested interest in serving our customers. Whether you are interacting with one of our resellers or directly with us, you'll receive prompt responses and knowledgeable assistance.



Rugged dual, die-cast spring tensioner provides easy, precise adjustment of door operation.



The SpaceGuard latch design resists wrenching and prying for superior security and safety. An additional safeguard is the anti-padlock open feature. Accommodates Trac-Rite's optional SpaceGuard cylinder lock for over-locking capability.




12-gauge, zinc-coated door stops are mounted to brackets for increased strength. 18-gauge, zinc-coated steel guides with polypropylene runners allow doors to glide smoothly.



No maintenance EP3 helical torsion high performance springs are coated for increased life. Felt tape located at each spiral drum allows the door to operate and coil with ease.



Sturdy galvalume bottom assembly is fitted with the Seal-Rite bulb and blade astragal for a protective weather seal. Zinc-plated exterior handle and molded plastic pull rope handle provide effortless opening and closing of the door.

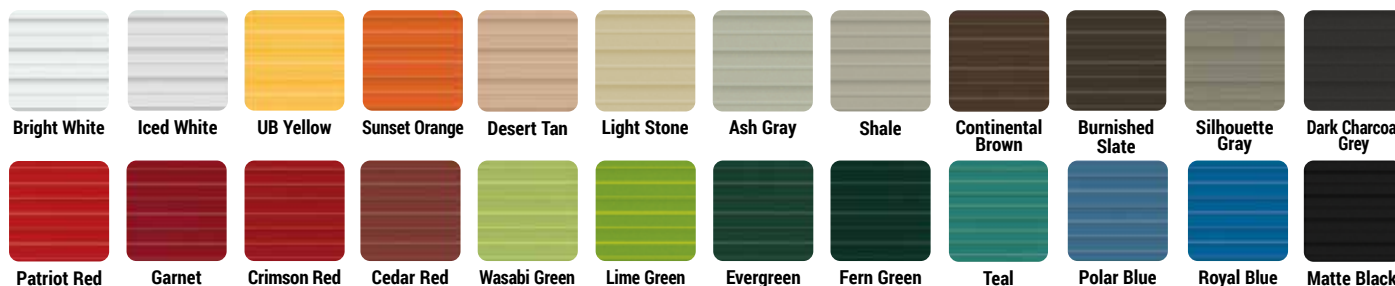

Colors vary from actual panel material. Please request a steel color sample for precise shade at 800.448.8979